

STANDARD ACCESSORIES


G19


C10



FEATURES

- Performance-approved motor
- Commercial grade direct drive brass cylinder ceramic plungers radial direction pump
- 8m high-pressure hose
- Pressure adjustable
- Professional trigger gun with safety lock
- 10-inch wheels
- Quick connect nozzles 0° ,15° ,25° ,40°
- In-line water filter
- Convenient hose and gun hook
- Water inlet hose connector
- Protection box
- 5m cable

OPTIONAL

- Total stop system

Model	LT-M5	LT-M7
Max. Pressure	180bar / 2600PSI	220bar / 3200PSI
Max. Flow	22.0L/min / 5.8GPM	22.0L/min / 5.8GPM
Motor Power	5000W	7500W
Voltage	AC 380V	AC 380V
Revolution	1450rpm	1450rpm
Pump Model	LT-P2212C1	LT-P2212C2
N.W./G.W.	76kgs / 78kgs	93kgs / 95kgs
Carton Size	770x465x520mm	860x540x640mm



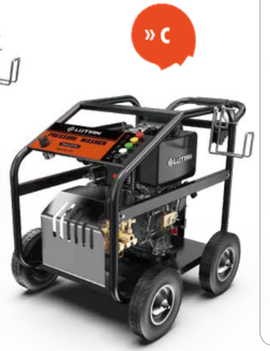

STANDARD ACCESSORIES


G19


C10



FEATURES

- Performance-approved key start diesel engine
- Commercial grade direct drive brass cylinder ceramic plungers radial direction pump
- 8m high-pressure hose
- Quick connect nozzles 0° ,15° ,25° ,40° and chemical nozzle
- Pressure adjustable
- Low pressure detergent injector
- Professional trigger gun with safety lock
- 10-inch pneumatic wheels
- In-line water filter
- Convenient hose and gun hook
- Water inlet hose connector

OPTIONAL ACCESSORIES

- Thermal relief valve
- Pressure gauge

Model	15D28-7	18D35-10
Max. Pressure	193bar / 2800PSI	240bar / 3500PSI
Max Flow	14.4L/min / 3.8GPM	20.7L/min / 5.47GPM
Horsepower	7.0HP	10.0HP
Revolution	3400rpm	3400rpm
Pump Model	3WZ-1508A	3WZ-1808A
N.W./G.W.	A:62kgs / 65kgs / C:72kgs / 74kgs	A:88kgs / 90kgs / C:95kgs / 99kgs
Carton Size	A:700x560x685mm / C:770x515x680mm	A:815x645x755mm / C:770x515x680mm